


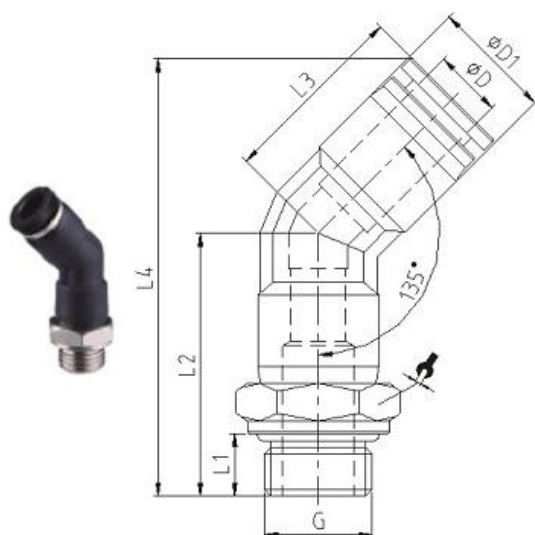

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ØD	G	L1	L2	L3	L4	ØD1	↗
APL45 04-G01	4	G1/8	5.5	25.5	19	42.5	11.3	14
APL45 04-G02	4	G1/4	7.5	28	19	45	11.3	17
APL45 04-G03	4	G3/8	7.5	28.5	19	45.5	11.3	20
APL45 06-G01	6	G1/8	5.5	25.5	19.2	43.5	13.3	14
APL45 06-G02	6	G1/4	7.5	28	19.2	46	13.3	17
APL45 06-G03	6	G3/8	7.5	28.5	19.2	46.5	13.3	20
APL45 06-G04	6	G1/2	10	31	19.2	49	13.3	24
APL45 08-G01	8	G1/8	5.5	29	22.5	49.5	14.8	14
APL45 08-G02	8	G1/4	7.5	31.5	22.5	52	14.8	17
APL45 08-G03	8	G3/8	7.5	32	22.5	52.5	14.8	20
APL45 08-G04	8	G1/2	10	34.5	22.5	55	14.8	24
APL45 10-G01	10	G1/8	5.5	33.5	27.8	60	18.7	17
APL45 10-G02	10	G1/4	7.5	36	27.8	62.5	18.7	17
APL45 10-G03	10	G3/8	7.5	36	27.8	62.5	18.7	20
APL45 10-G04	10	G1/2	10	39.5	27.8	66	18.7	24
APL45 12-G01	12	G1/8	5.5	36	29.5	64	21.3	21
APL45 12-G02	12	G1/4	7.5	38.5	29.5	66.5	21.3	21
APL45 12-G03	12	G3/8	7.5	38.5	29.5	66.5	21.3	21
APL45 12-G04	12	G1/2	10	41.5	29.5	69.5	21.3	24