


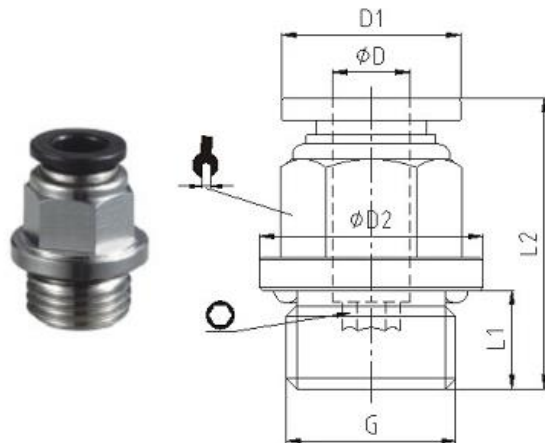

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg(10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	G	ΦD1	ΦD2	L1	L2	○	✚
APC04-G01	4	G1/8	10.6	14	5.5	20.2	3	10
APC04-G02	4	G1/4	10.6	17	7.5	18.2	3	10
APC04-G03	4	G3/8	10.6	20	7.5	19.1	3	10
APC06-G01	6	G1/8	12.6	14	5.5	20.3	4	14
APC06-G02	6	G1/4	12.6	17	7.5	22.4	4	12
APC06-G03	6	G3/8	12.6	20	7.5	20.2	4	12
APC06-G04	6	G1/2	12.6	24	10	24.8	4	12
APC08-G01	8	G1/8	14	14	5.5	25.8	5	14
APC08-G02	8	G1/4	14	17	7.5	24.7	5	14
APC08-G03	8	G3/8	14	20	7.5	21.2	5	14
APC08-G04	8	G1/2	14	24	10	25.2	5	14
APC10-G01	10	G1/8	18.1	14	5.5	29.8	5	17
APC10-G02	10	G1/4	18.1	17	7.5	30.8	6	17
APC10-G03	10	G3/8	18.1	20	7.5	28.2	8	17
APC10-G04	10	G1/2	18.1	24	10	26.3	8	17
APC12-G01	12	G1/8	20.6	14	5.5	31.2	5	21
APC12-G02	12	G1/4	20.6	17	7.5	32.7	6	21
APC12-G03	12	G3/8	20.6	20	7.5	29.7	8	21
APC12-G04	12	G1/2	20.6	24	10	32.2	8	21
APC14-G03	14	G3/8	23	22	7.5	32.5	8	22
APC14-G04	14	G1/2	23	24	10	30	10	24
APC15-G03	15	G3/8	27	24	7.5	34.5	8	24
APC15-G04	15	G1/2	27	24	10	31.5	10	24
APC16-G03	16	G3/8	24.8	20	7.5	36.1	8	24
APC16-G04	16	G1/2	24.8	24	10	38.2	10	24