


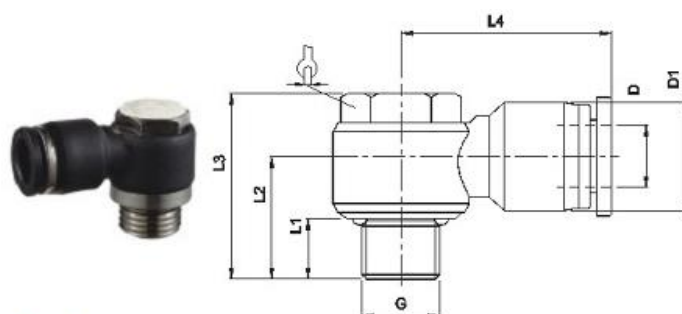

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg (10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	G	L1	L2	L3	L4	ΦD1	✎
APH04-G01	4	G1/8	5.5	14.5	23	23.5	11.5	12
APH04-G02	4	G1/4	7.5	17.3	26.3	25.5	11.5	14
APH06-G01	6	G1/8	5.5	14.5	23	23.5	13.5	12
APH06-G02	6	G1/4	7.5	16.7	26.3	25.4	13.5	14
APH06-G03	6	G3/8	7.5	19	32	29.5	13.5	19
APH06-G04	6	G1/2	10	24.5	39	32.5	13.5	24
APH08-G01	8	G1/8	5.5	15.2	23	26.5	15	12
APH08-G02	8	G1/4	7.5	18	26.3	28.9	15	14
APH08-G03	8	G3/8	7.5	19	32	29.8	15	19
APH08-G04	8	G1/2	10	24.5	39	32.5	15	24
APH10-G01	10	G1/8	5.5	17.2	23	30.5	19	12
APH10-G02	10	G1/4	7.5	20	26.3	32.6	19	14
APH10-G03	10	G3/8	7.5	21	32	33	19	19
APH10-G04	10	G1/2	10	24.7	39	36	19	24
APH12-G02	12	G1/4	7.5	21.3	26.3	33.5	21.5	14
APH12-G03	12	G3/8	7.5	22.2	32	35.5	21.5	19
APH12-G04	12	G1/2	10	26	39	36.5	21.5	24