


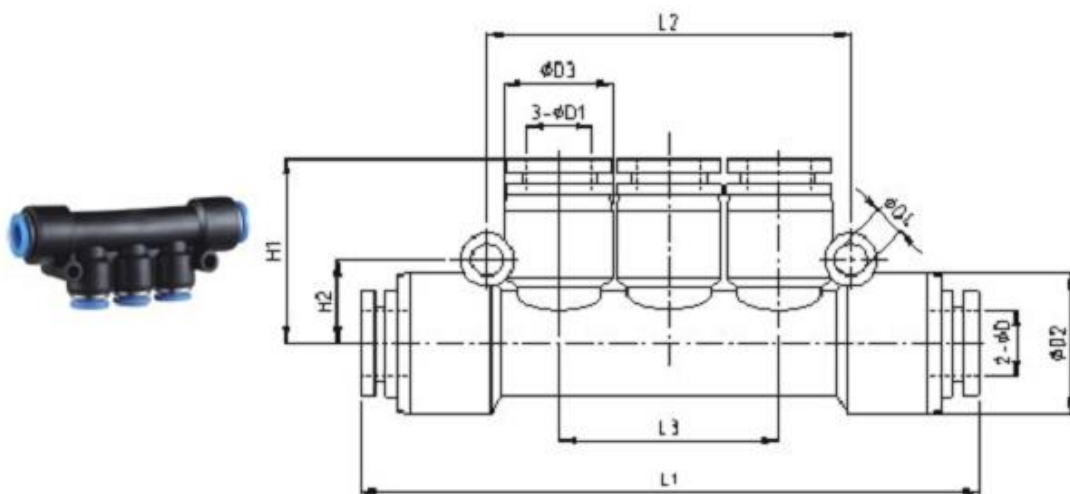

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg(10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	ΦD1	ΦD2	ΦD3	ΦD4	L1	L2	L3	H1	H2
APK04	4	4	14.5	13	3.2	57	36	22	19	8
APK06	6	6	14.5	13	3.2	58	36	22	19.5	8
APK08	8	8	19	14.5	4.2	84	61	29	24.5	11.5
APK10	10	10	19	14.5	4.2	87	61	29	26	11.5
APK06-04	6	4	14.5	13	3.2	58	36	22	19	8
APK08-04	8	4	18.4	14.5	3.2	62	42	26	20.5	9
APK08-06	8	6	18.4	14.5	3.2	81	48	29	24.5	9
APK10-06	10	6	19	14.5	4.2	87	61	29	24.5	11.5
APK10-08	10	8	19	14.5	4.2	87	61	29	24.5	11.5

MODEL	ΦD	ΦD1	ΦD2	ΦD3	ΦD4	L1	L2	L3	H1	H2
APK3/16-5/32	3/16	5/32	14.5	13	3.2	58	36	22	19	8
APK1/4-3/16	1/4	3/16	14.5	13	3.2	58	36	22	19	8
APK5/16-1/4	5/16	1/4	14.5	13	3.2	58	42	26	21	9
APK3/8-5/16	3/8	5/16	19	14.5	4.2	87	60.8	29	24.5	11.5