


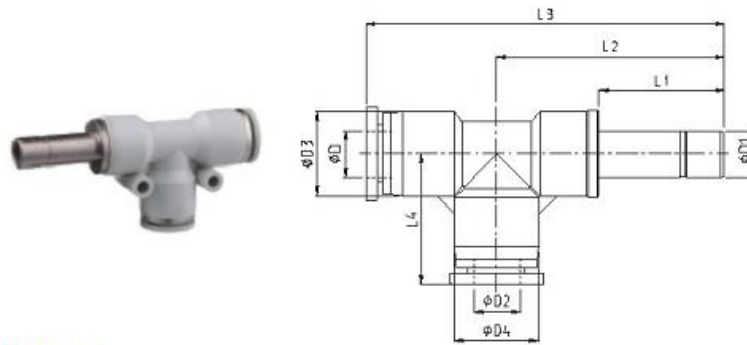

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg(10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	ΦD1	ΦD2	ΦD3	ΦD4	L1	L2	L3	L4
APDJ 04	4	4	4	11.5	11.5	19	35	54	19
APDJ 06	6	6	6	13.5	13.5	19	35.8	55	19.2
APDJ 08	8	8	8	15	15	20.5	40.5	63	22.5
APDJ 10	10	10	10	19	19	24.5	49.5	77.3	27.8
APDJ 12	12	12	12	21.5	21.5	26	52	81.5	29.5
APDJ 06-04	6	6	4	13.5	13.5	19	35.8	55	19.2
APDJ 08-06	8	8	6	15	15	20.5	40.5	63	22.5
APDJ 10-08	10	10	8	19	19	24.5	49.5	77.3	27.8
APDJ 12-10	12	12	10	21.5	21.5	26	52	81.5	29.5