


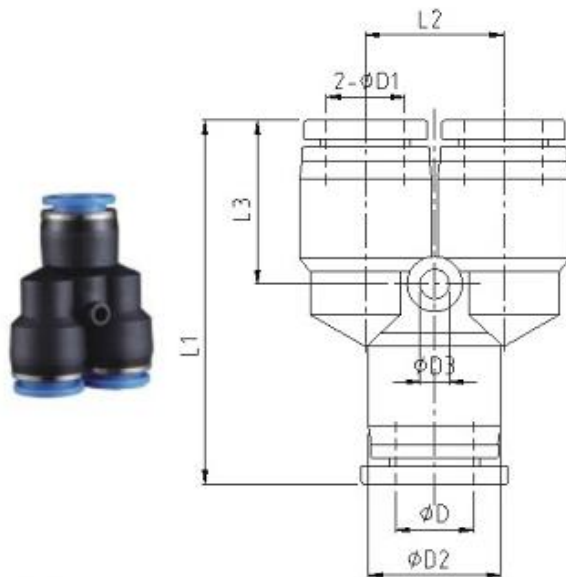

Features

- *One-touch tube fittings are used in pneumatic piping.
- *The tube fittings come in a wide variety of models to meet all your needs in pneumatic piping.
- *Even after installation, the direction of the tube can be changed freely.
- *Nickel-Plated metal body ensures anti-corrosion and anti-contamination.
- *All R and NPT threads are pre-coated sealant.

Specifications

Fluid Type	Air (No other type of gas or liquid)	
Working Pressure Range	0~150PSI	0~9.9Kgf/cm ² (0~990KPa)
Negative Pressure	-29.5 in Hg	-750mm Hg(10 Torr)
Working Temperature	32~140°F	0~60°C

MODEL	ΦD	ΦD1	ΦD2	ΦD3	L1	L2	L3
APY04	4	4	11.5	3.2	36.5	11	14.5
APY06	6	6	13.5	3.2	37.5	13	15
APY08	8	8	15	3.2	39.8	15	18
APY10	10	10	19	4.2	50	18	21
APY12	12	12	21.5	4.2	53	21	21.5
APY16	16	16	26.5	4.3	58.5	25	22
APY06-04	6	4	13.5	3.2	37.5	13	15
APY08-04	8	4	15	3.2	39.8	15	18
APY08-06	8	6	15	3.2	39.8	15	18
APY10-06	10	6	19	4.2	39.8	18	21
APY10-08	10	8	19	4.2	50	18	21
APY12-08	12	8	21.5	4.2	53	21	21.5
APY12-10	12	10	21.5	4.2	53	21	21.5

MODEL	ΦD	ΦD1	ΦD2	ΦD3	L1	L2	L3
APY5/32	5/32	5/32	11.5	3.2	36.5	11	14.5
APY3/16	3/16	3/16	11.5	3.2	36.5	11	14.5
APY1/4	1/4	1/4	13.5	3.2	37.5	13	15
APY5/16	5/16	5/16	15	3.2	39.8	15	18
APY3/8	3/8	3/8	19	4.2	50	18	21
APY1/2	1/2	1/2	21.5	4.2	53	21	21.5
APY3/16-5/32	3/16	5/32	11.5	3.2	36.5	11	14.5
APY1/4-3/16	1/4	3/16	13.5	3.2	37.5	13	15
APY3/8-5/16	3/8	5/16	19	4.2	50	18	21
APY1/2-3/8	1/2	3/8	21.5	4.2	53	21	21.5